







1.1. Vänligen läs!

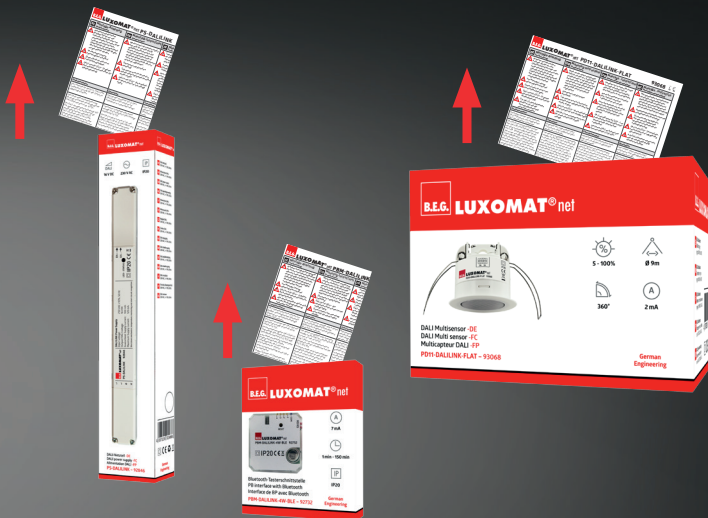


1.2


Använd endast tillåtna topologier!




Bus




Ring




Star



Extended Star




Hierarchical



Mesh

1.3. Använd endast lågspänningskabel!



NYM-J (1,5mm² / 2,5mm²)






J-Y(ST)Y

2.1. Installera applikationen!






2.2

Välj språk!

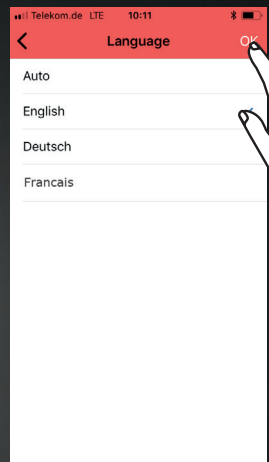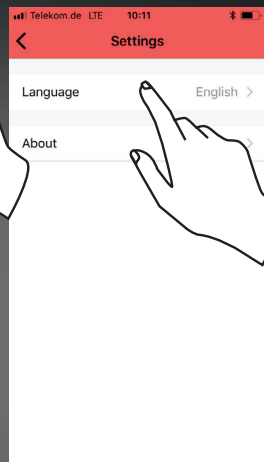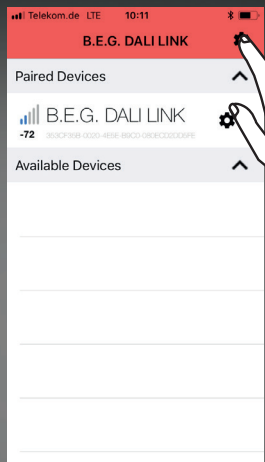




2.3

Namnge rum / plats!

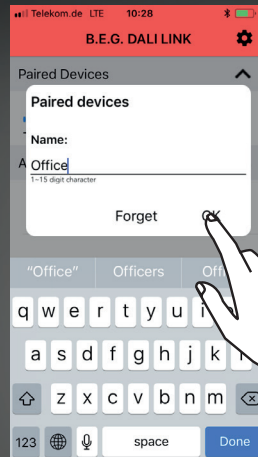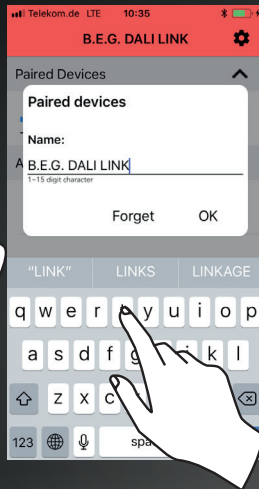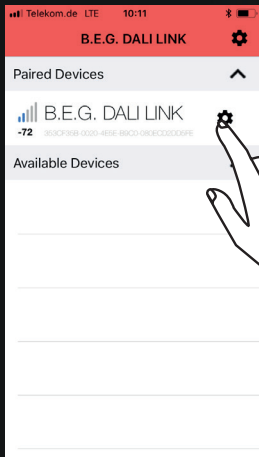




2.4

Använd kod "123456" för parning!

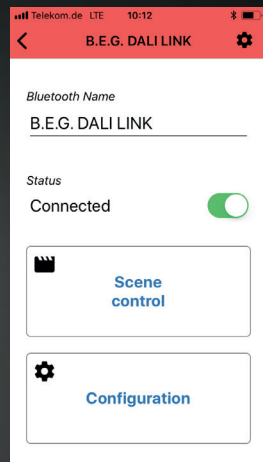
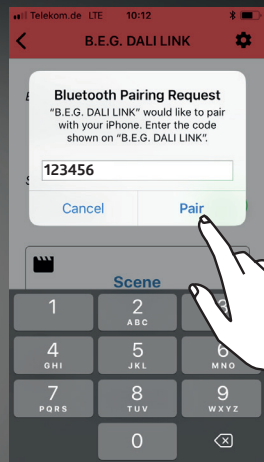
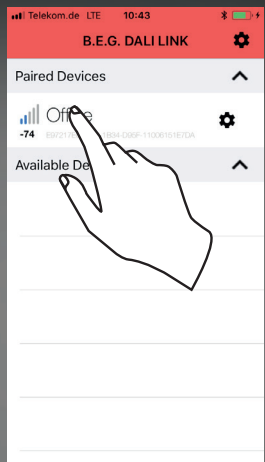


2.5

Ändra lösenord!

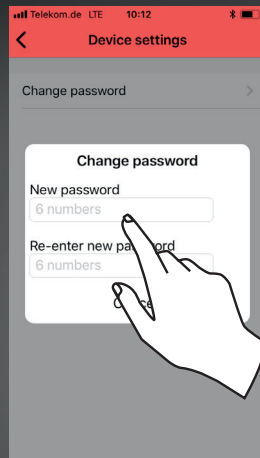
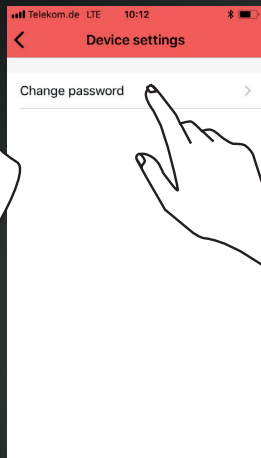
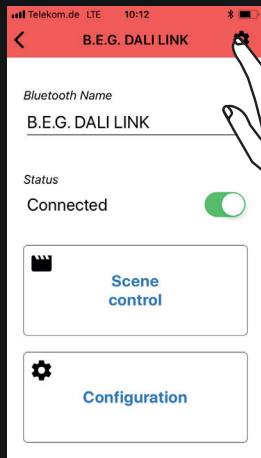


2.6 Aktivera konfigurationsläge med QR-kod!


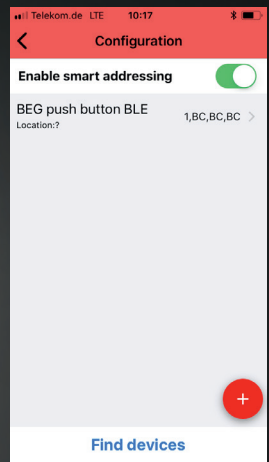
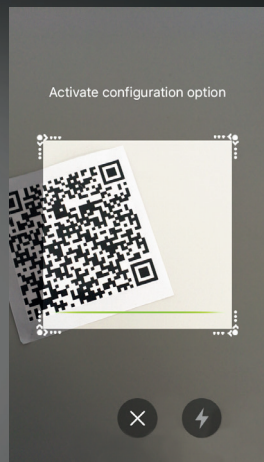
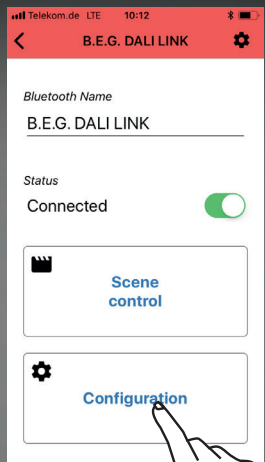


3.1

Hitta / adressera enheter!

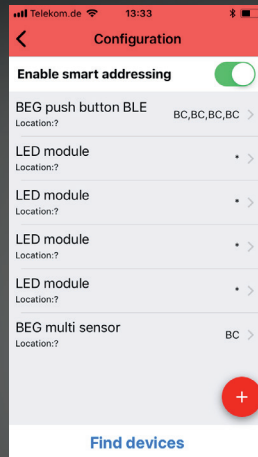
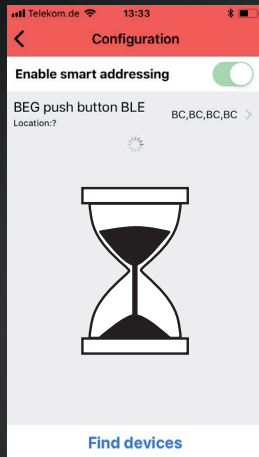
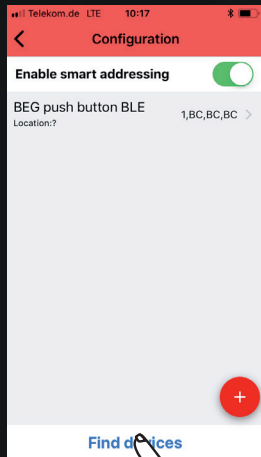


3.2 Namnge och grupp-id till enheter!

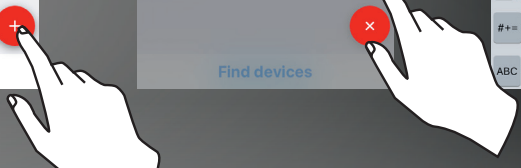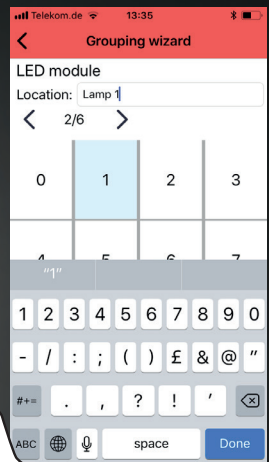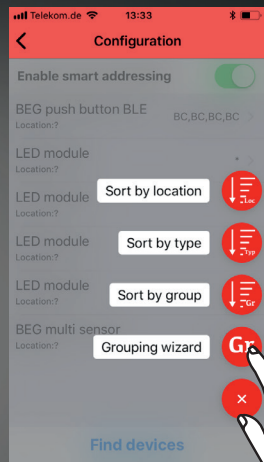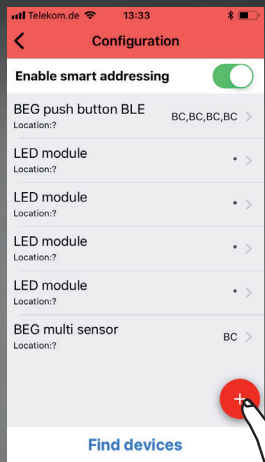




3.3

Ändra enheters parametrar vid behov!

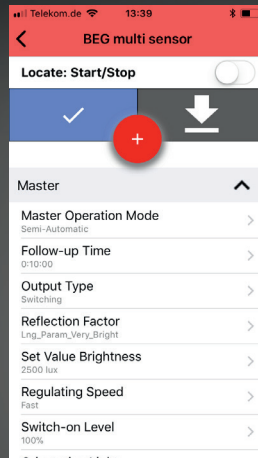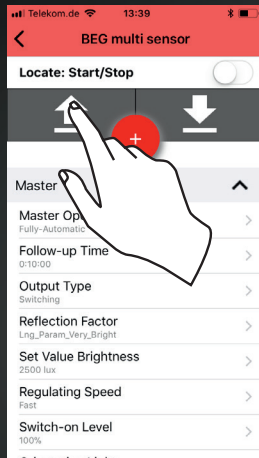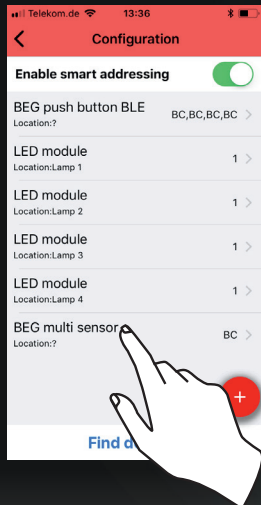




4.1

Skapa scenario!

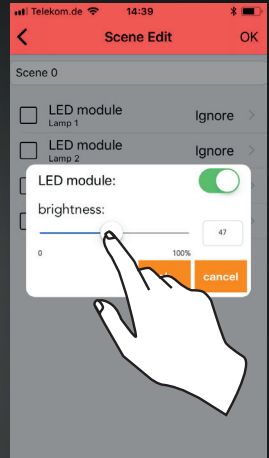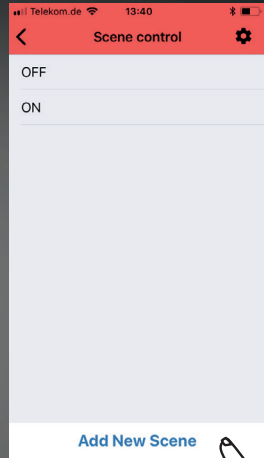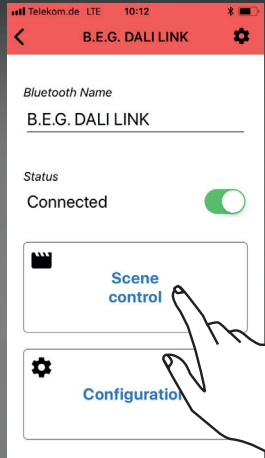




4.2

Redigera eller ta bort scenario!

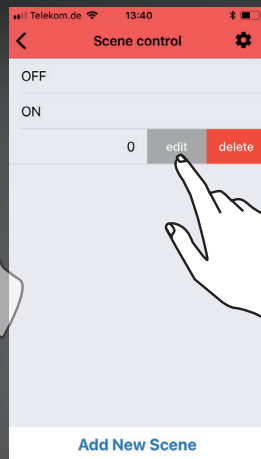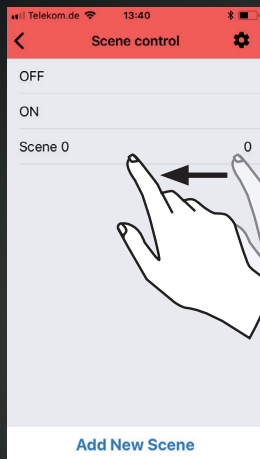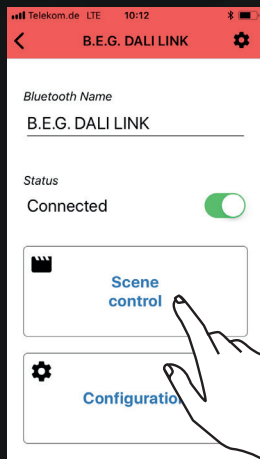

5.1

Felmeddelande!

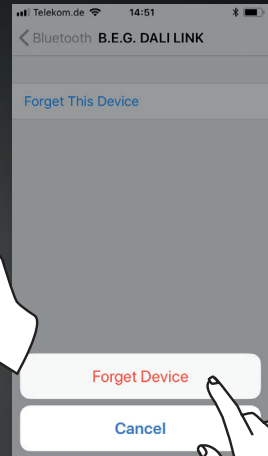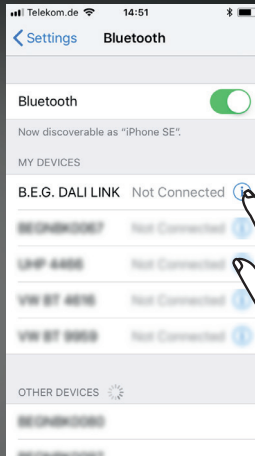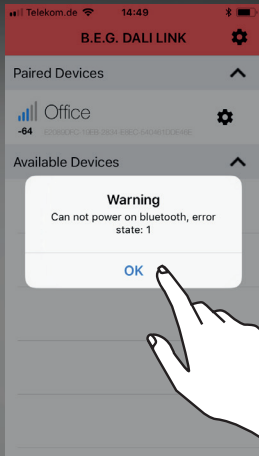

6.1

Ladda ner applikationens beskrivning! (www.rutab.se)

B.E.G.

PRODUCTS **SOLUTIONS** USERS SERVICE THE COMPANY

SEARCH CONTACT GREAT BRITAIN

DALI LINK

The intelligent and economical single room solution from B.E.G.

Solutions - **DALI LINK**

DALI LINK single room solution

The entry-level set for small offices consists of a DALI LINK power supply, a PD11 DALI LINK multisensor and a DALI LINK 4-way pushbutton interface with built-in Bluetooth gateway. The super flat PD11 is the first choice for the most demanding architectural considerations, with a large detection range for its class.

Unlike other systems, the DALI LINK PD11 is not only a multisensor but also a master occupancy detector with its own intelligence as a controller. Therefore B.E.G. DALI LINK is highly fail safe, expandable and economical. All components are also available individually, so that larger rooms such as conference rooms and classrooms can be covered.



LUXOMAT^{net}
 PBM-DALILINK-4W-BLE 92732
 IP20 CE

L
 I
 N
 E

LUXOMAT^{net}
 PS-DALILINK 92846

DALI LINK Power Supply
 Input voltage: 230 VAC ±10%, 50 Hz
 Output/DALI voltage: 16 VDC
 Guaranteed Supply current: 100 mA
 Maximum Supply current: 120 mA
 Shut down mechanism: temperature monitoring and short-circuit recognition

LUXOMAT^{net}
 P011-DALILINK-FLAT 93068
 IP20 CE

